

IP65  
GLD280

GLD280 Series LED Fluorescent Lamp



IP65  
GLD280

GLD280 Series LED Fluorescent Lamp


FEATURES

- High quality PC, with high strength, impact resistance and corrosion resistance;
- High quality LED T8 tubes, high light efficiency, high CRI and long lifespan;
- Patented sealing structure with excellent weather-proof performance for harsh environment;
- Wide voltage input, constant current, have short-circuit and over-voltage protection,
- Good EMC: excellent electromagnetic compatibility and anti-interference.
- Wiring with steel tube or cable(pls specify when need steel tube)

SPECIFICATION

|                     |                                                 |       |       |       |
|---------------------|-------------------------------------------------|-------|-------|-------|
| Rated Voltage       | AC220V 50/60Hz                                  |       |       |       |
| Housing Type        | I                                               | II    | III   | IV    |
| Rated Wattage(W)    | 1x10                                            | 2x10  | 1x20  | 2x20  |
| Luminous Flux(LM)   | 1,300                                           | 2,600 | 2,600 | 5,200 |
| Weight(kg)          | 1.8                                             | 2.3   | 2.2   | 3.0   |
| Color Temperature   | 3000/5000/6500K                                 |       |       |       |
| IP Grade            | IP65                                            |       |       |       |
| Ambient temperature | -40°C~ +60°                                     |       |       |       |
| Cable Entry         | M20X1.5                                         |       |       |       |
| Terminals           | wires≤2.5mm²                                    |       |       |       |
| Installation        | Ceiling/Pendant/Hanging Chain/Wall/Fence/Flange |       |       |       |


LIGHT DISTRIBUTION CURVE

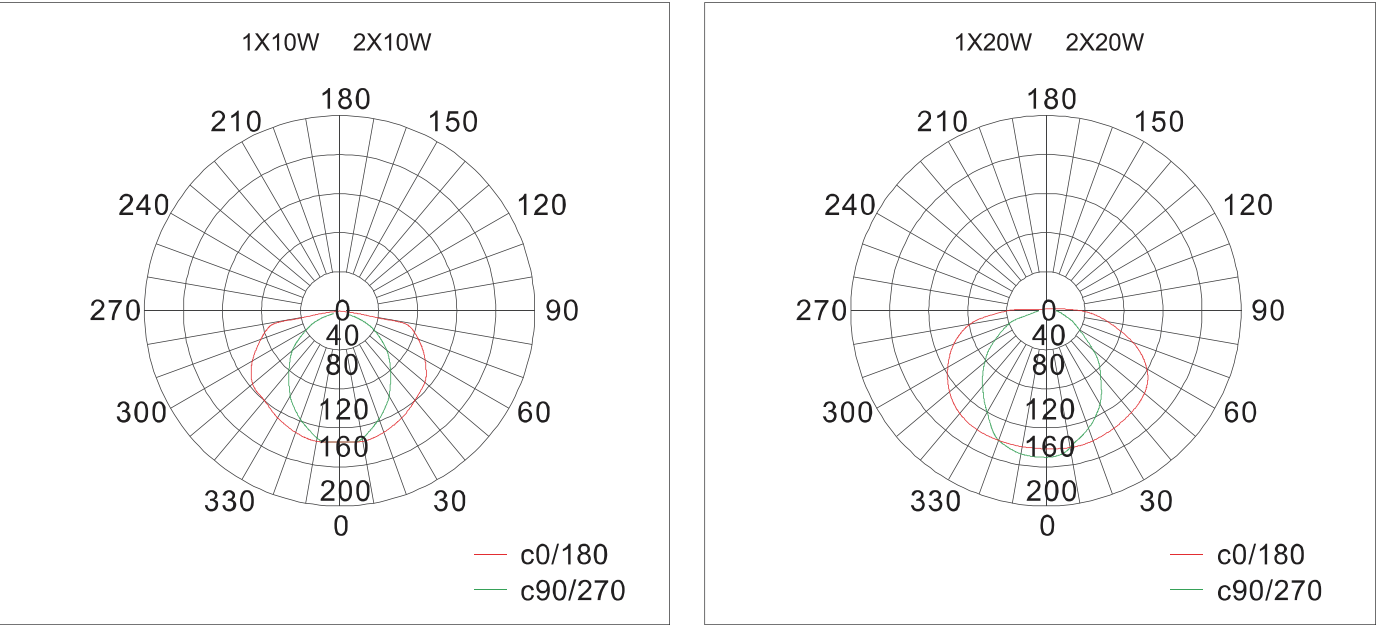

IP65  
GLD280


GLD280 Series LED Fluorescent Lamp

DIMENSION

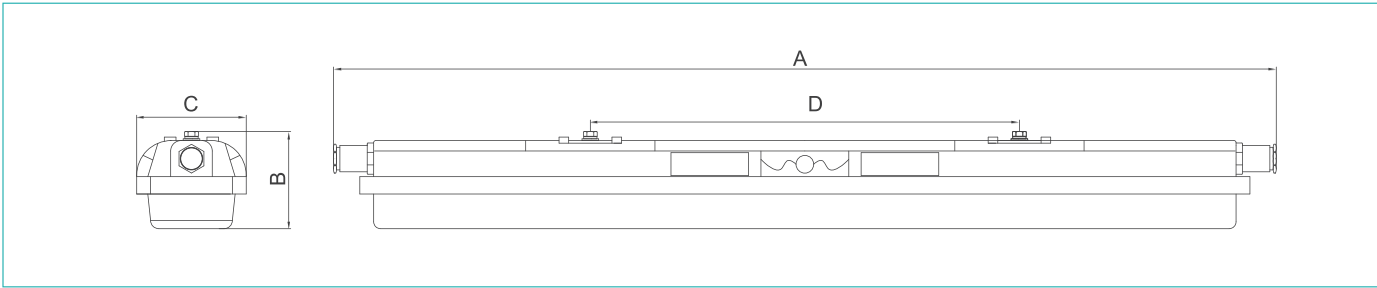

| Model       | A(mm) | B(mm) | C(mm) | D(mm) |
|-------------|-------|-------|-------|-------|
| GLD280-1×10 | 650   | 130   | 130   | 500   |
| GLD280-2×10 | 650   | 130   | 180   | 500   |
| GLD280-1×20 | 1266  | 130   | 130   | 800   |
| GLD280-2×20 | 1266  | 130   | 180   | 800   |

INSTALLATION

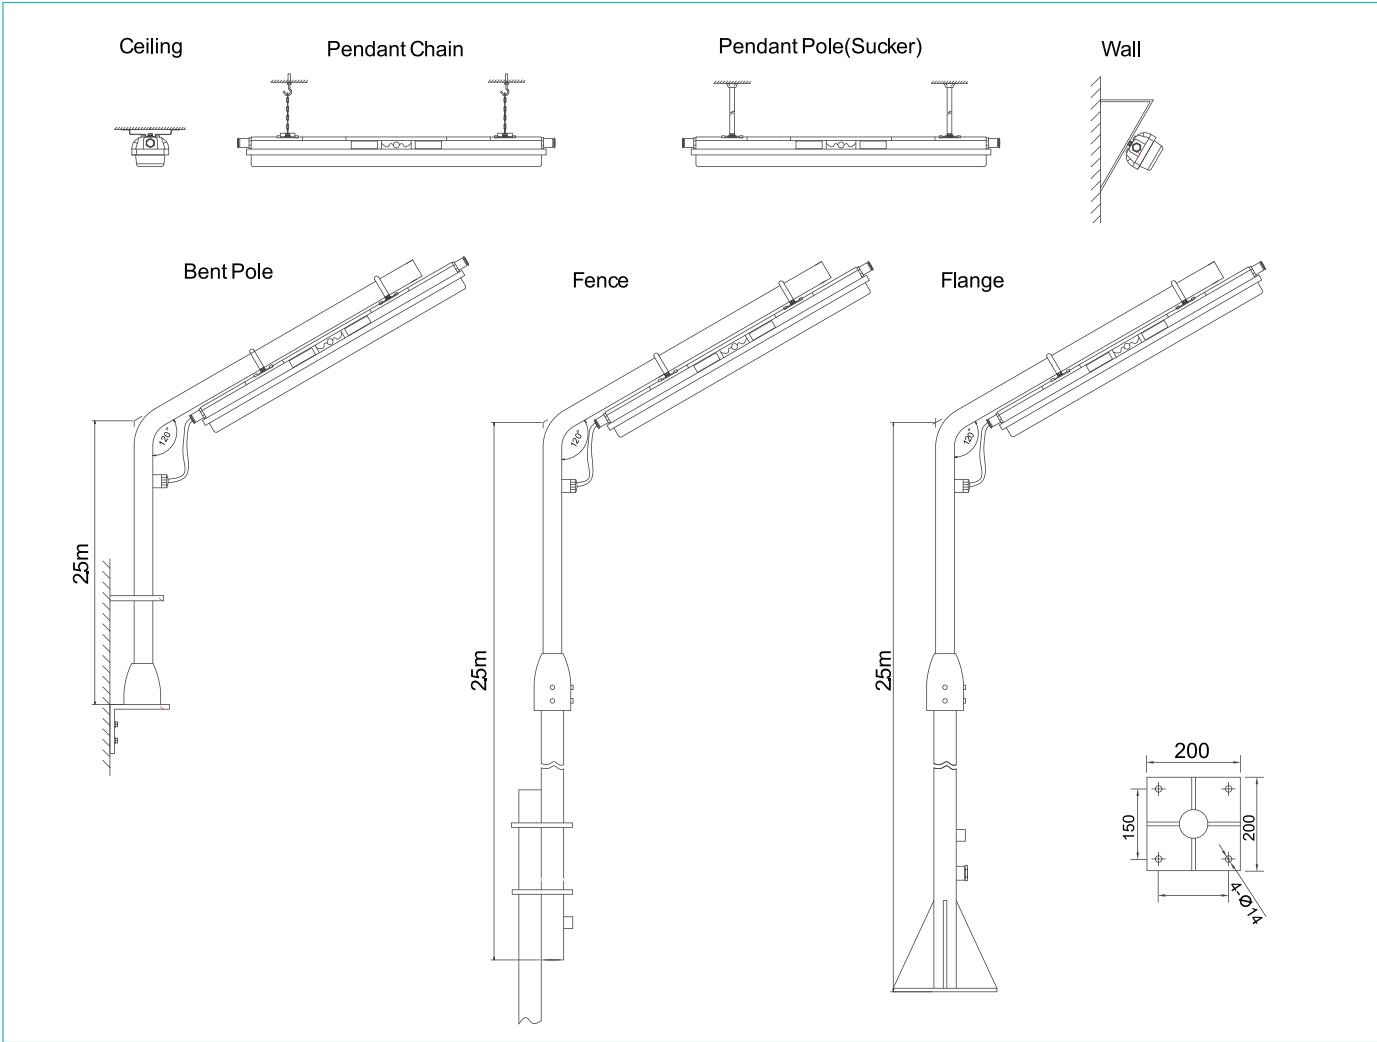

NOTE

GLD280 Series LED Fluorescent Lamp