

IP67
GLD8570

GLD8570 LED Canopy Light




IP67
GLD8570

GLD8570 LED Canopy Light

FEATURES

- Modular pluggable technology, tool-free onsite maintenance;
- Honeycomb and whole structure cooling technology, high efficient heat dissipation;
- Non-wire eutectic soldering;
- Double-coupling IP68 protection, highest waterproof level;
- Single unit's damage won't affect other units' current;
- Intelligent constant current driving technology, long life span;
- Ergonomic light distribution to achieve uniform illuminating effect;
- Free modular serialization and full power range solutions.

LIGHT DISTRIBUTION CURVE

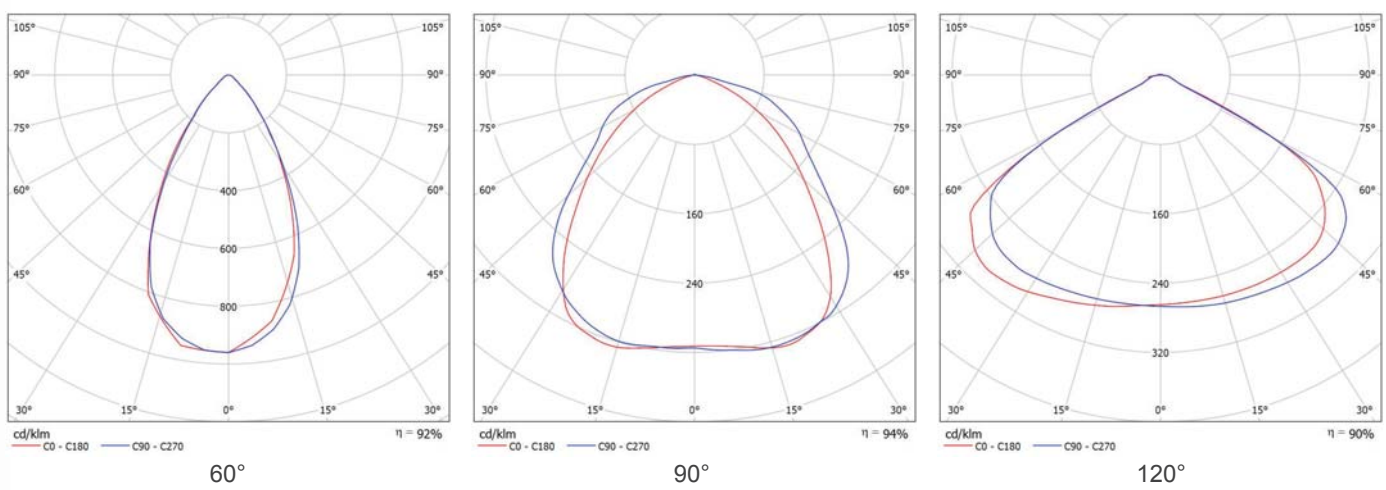

TECHNICAL SPECIFICATION

Input voltage	Power Efficiency	Power Factor	Junction temperature	CRI	Working Environment	Storage Temperature
AC100V-277V	91%	0.95	<80°C	Ra70±5	-40°C~+50°C 10%~90%RH	-40°C~+50°C


LED Life Span	Surge Protection	CCT	LED Brand	Material	IP Rating
AC100V-277V	91%	0.95	<80°C	Ra70±5	-40°C~+50°C 10%~90%RH

Module Qty	System Power(W)	LM/W	Initial Lumens	Product Size (mm)	Packaging Dimension (mm)	N.W. (kg)	G.W.(kg)
GLD8570-1	72W	128	7680lm	350x229x65	430x410x230	4.8	5.9
GLD8570-2	108W	128	11520lm	350x311x65	450x410x230	5.6	6.7
GLD8570-3	150W	128	15360lm	350x393x65	490x410x230	6.7	8.0


IP67
GLD8570

GLD8570 LED Canopy Light

DIMENSION

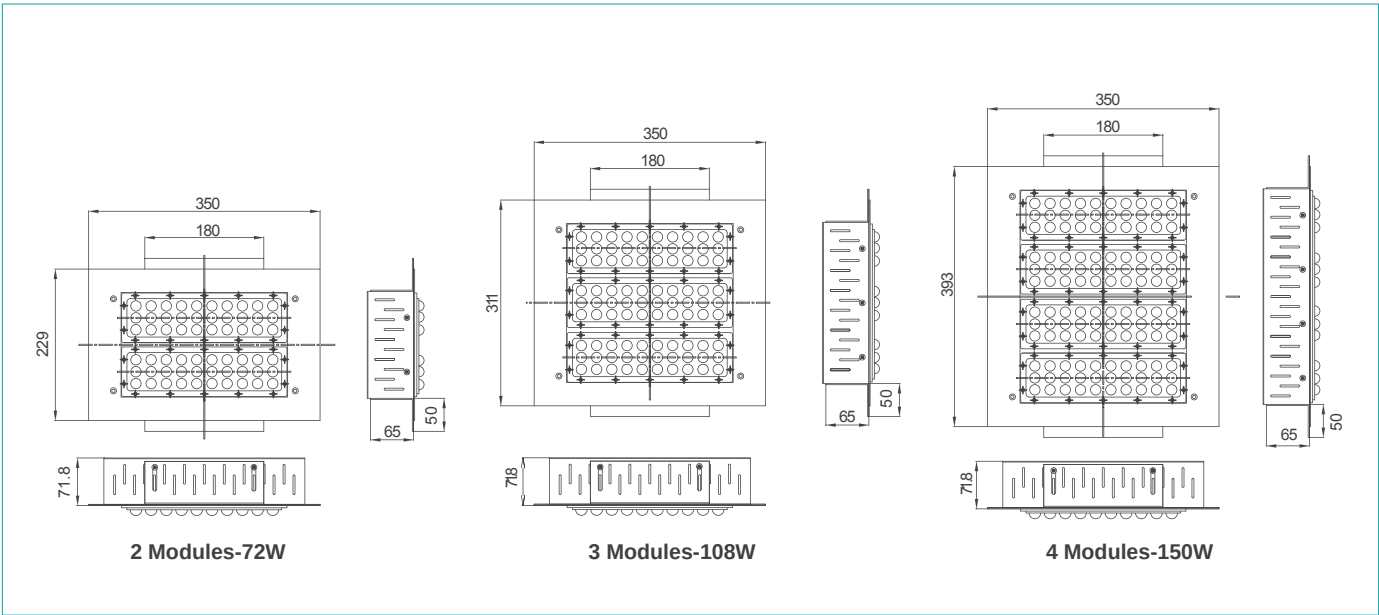

INSTALLATION

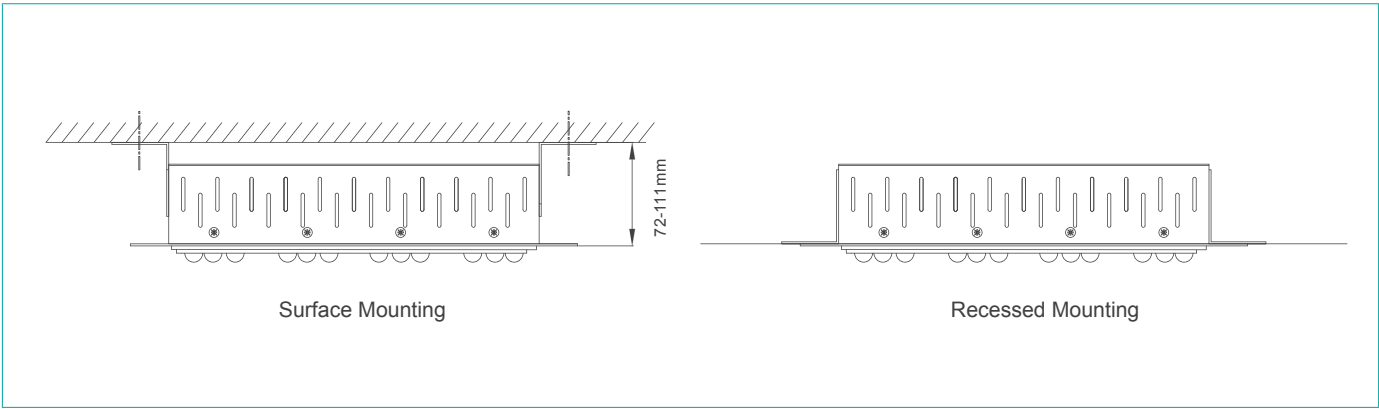

NOTE

GLD8570 LED Canopy Light